

Full-scenario comprehensive solution

## Small-sized Matching Outline

**4**  
MM

### **Slim luminous surface**

Ultimately slim, for delicate cabinet

**30**  
MM

### **Small bending radius**

Bend-proof, flexible for creative styling

**10.87**  
MM

### **Small cutting unit**

More precise size, more free design




Small-sized Matching Outline Full-scenario comprehensive solution

# 4mm Slim luminous surface

Ultimately slim, for delicate cabinet

Model: NMS0410

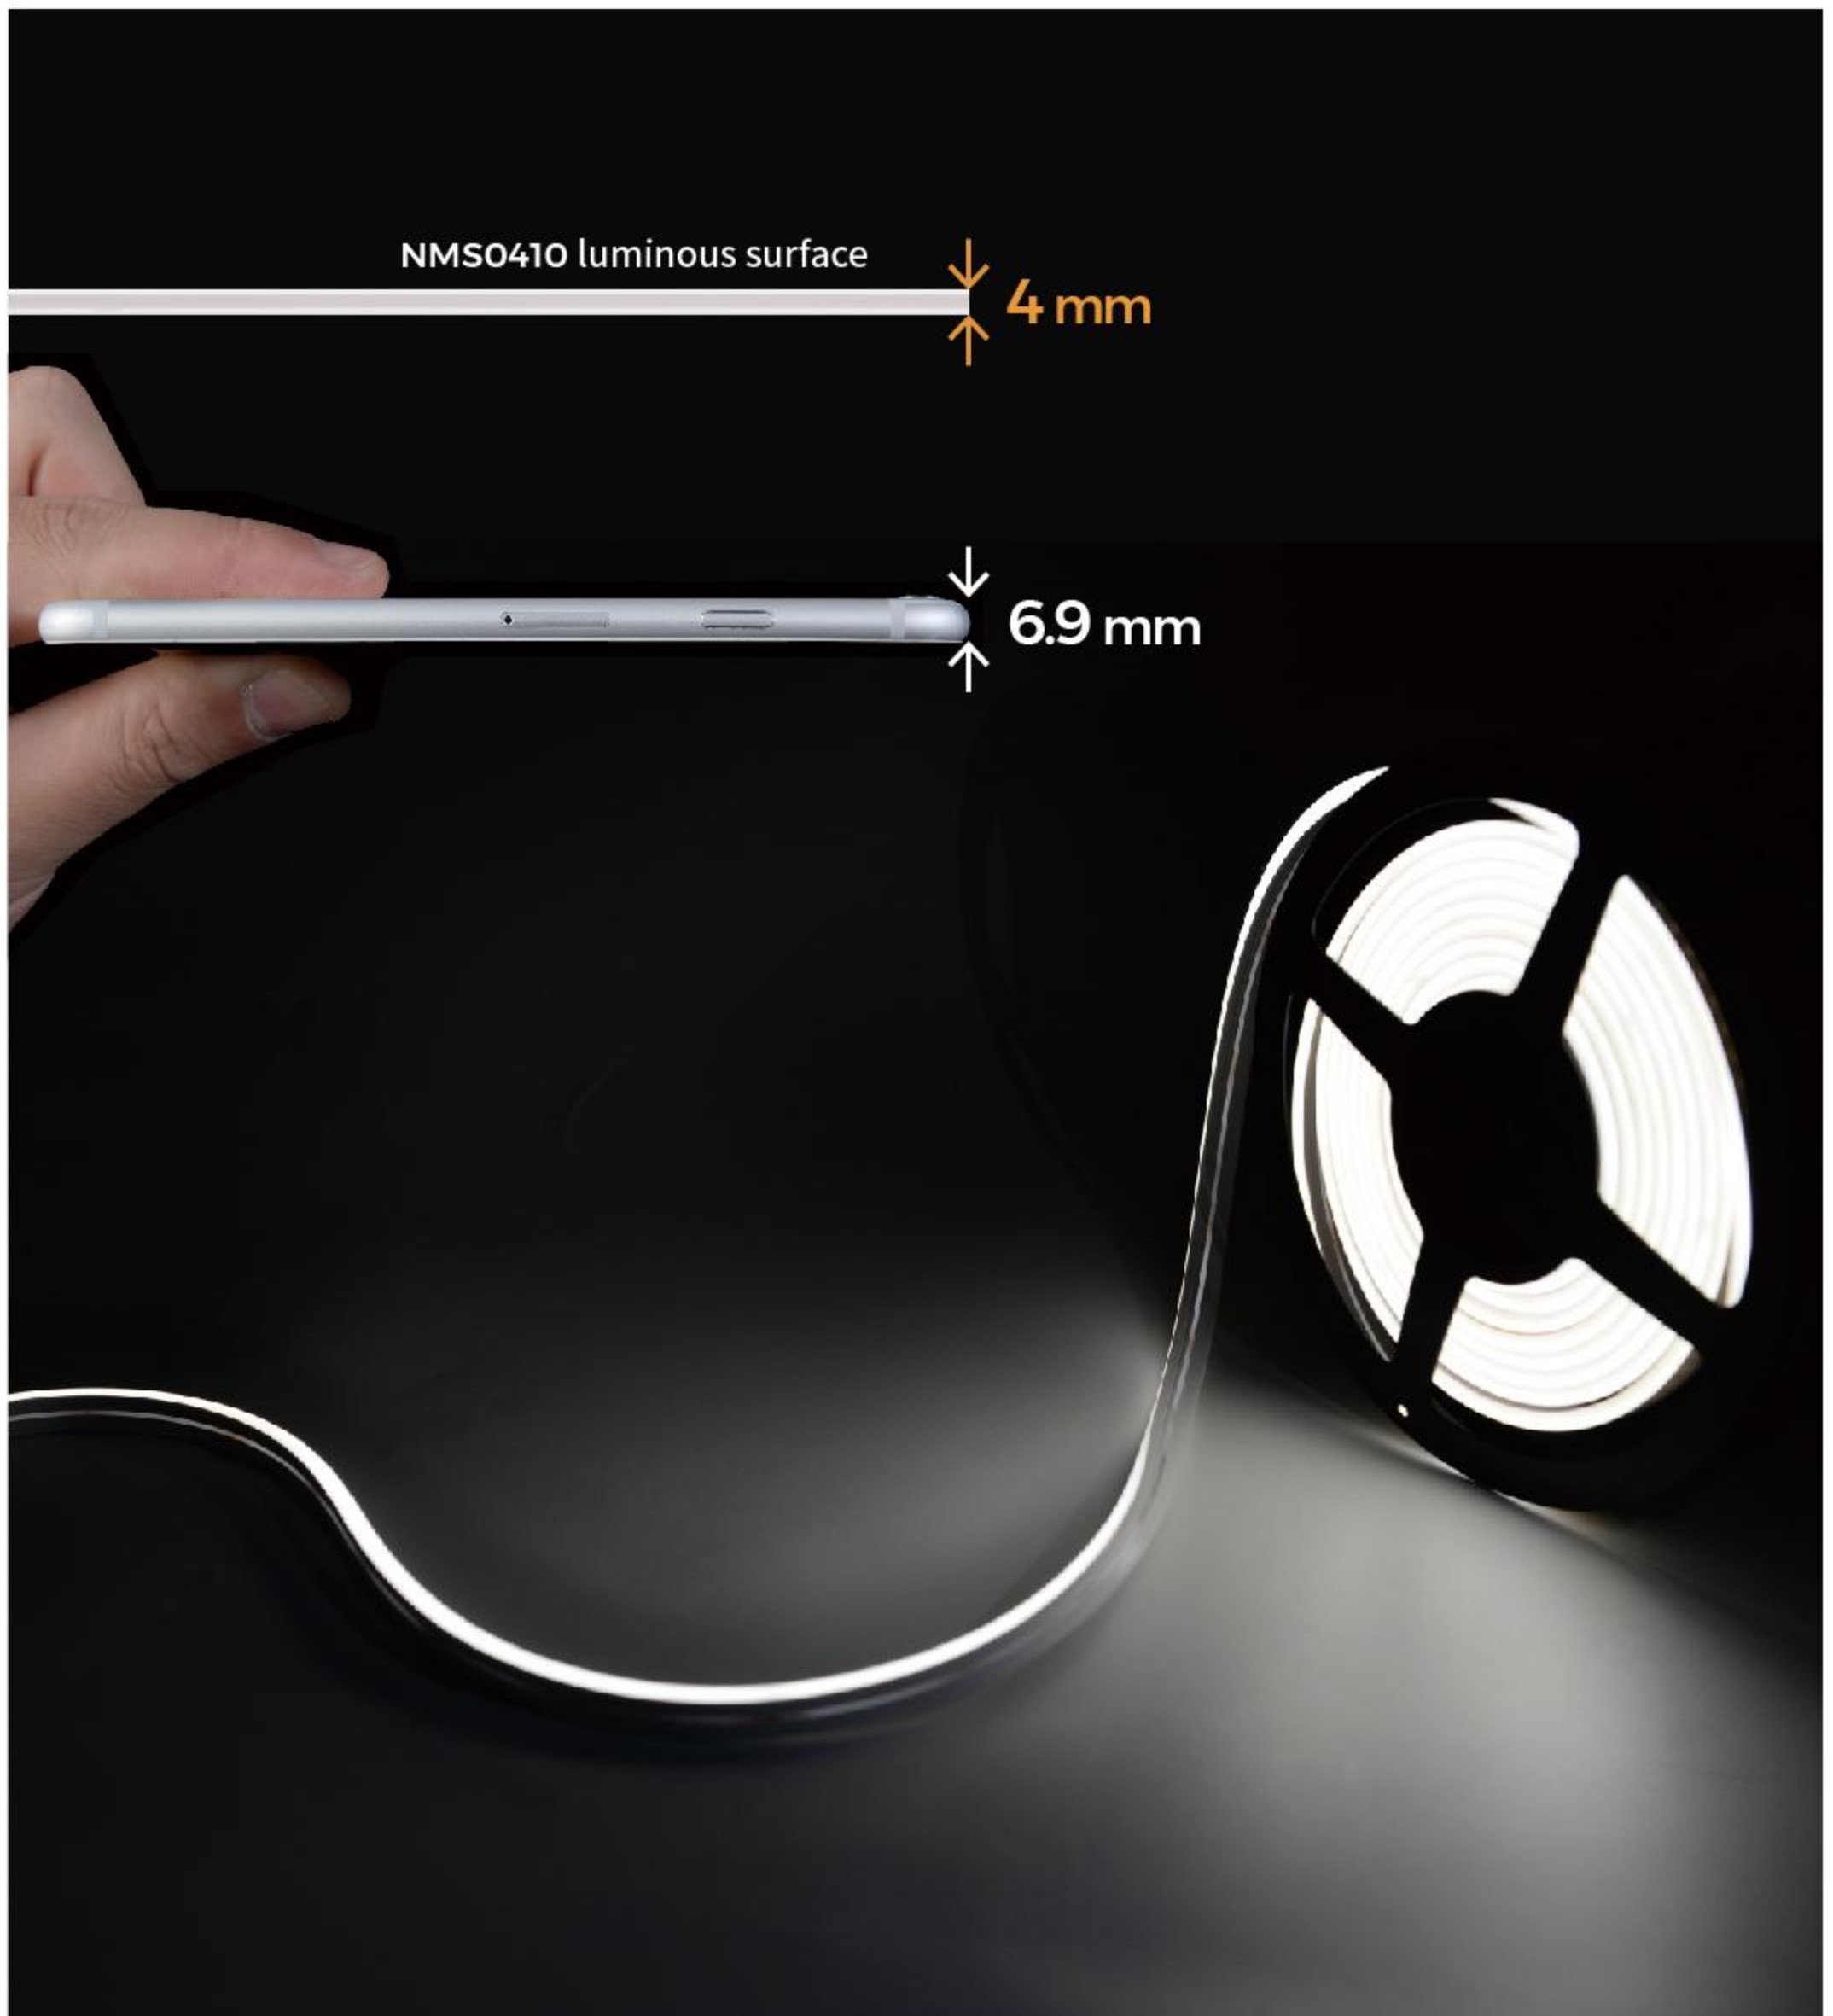

Small-sized  
Matching Outline

Full-scenario  
comprehensive solution

## 30mm Small bending radius

Bend-proof, flexible for creative styling


Model: NMS0410/NTT0606




## 10.87mm Small cutting unit

More precise size, more free design

Model: NTT0606(12V)

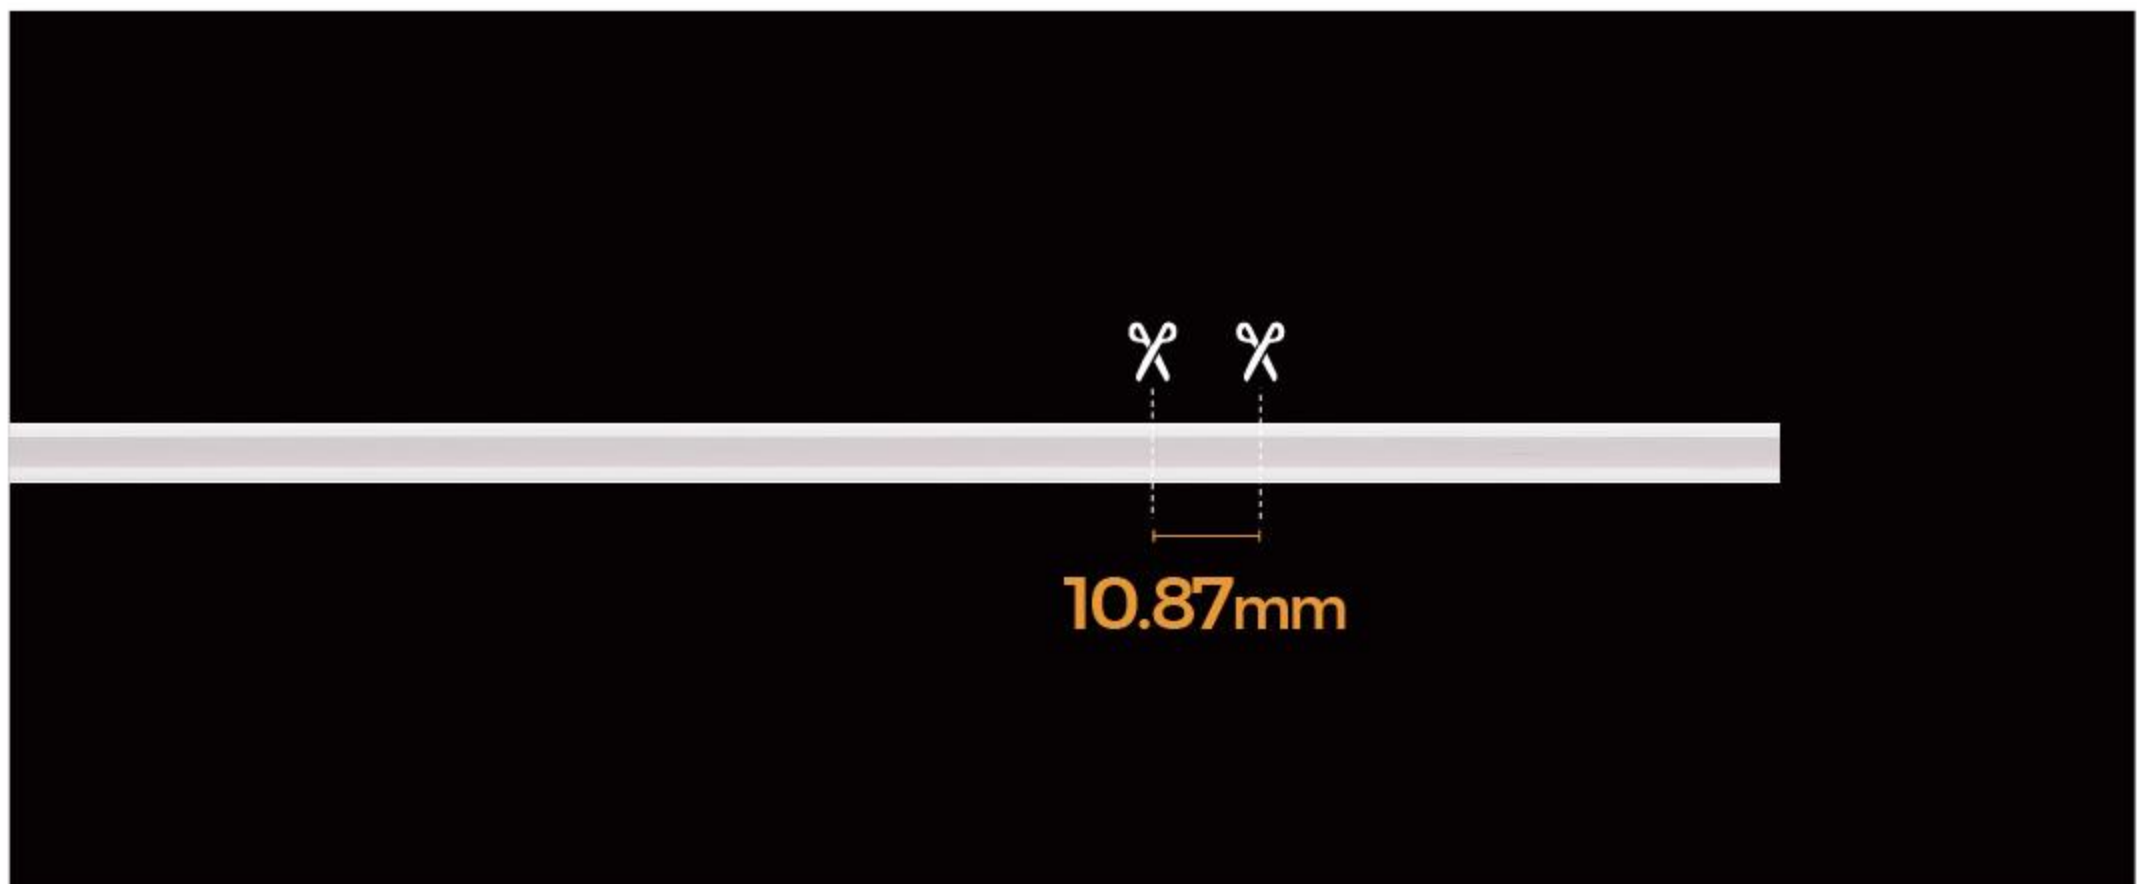



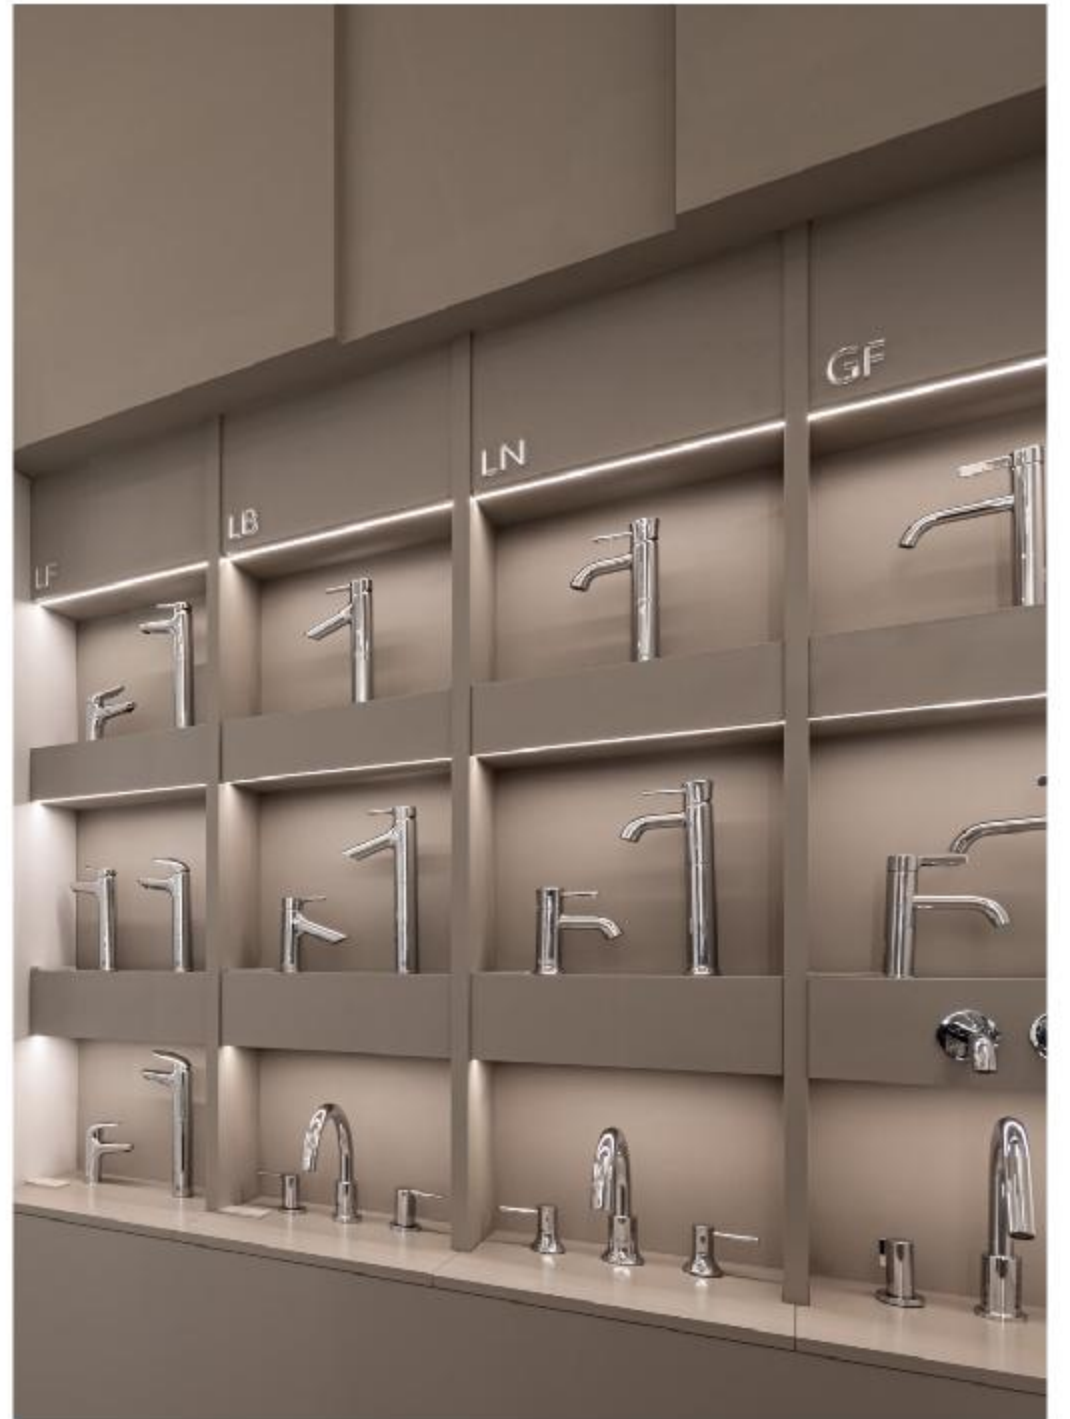

Small-sized Matching Outline Full-scenario comprehensive solution

# Product List

Model	Input voltage (V)	Typ.power (W/m)	CRI	CCT	Luminous flux (LM/m)	Efficiency (LM/w)	Cutting unit (LED/mm)	Bending radius (mm)	Length (M)	IP process
NMS0410	12	7.2	>90	2300 K 2700 K 3000 K 4400 K	240/240/240/270	33/33/33/37.5	3/17.86	>30	5	IP65
			>90	2300 K 4000 K	220	24	6/15.625			
			/	G B	/	/	3/17.86			
	24	7.2	>90	2300 K 2700 K 3000 K 4400 K	240/240/240/270	33/33/33/37.5	7/41.66			
			>90	2300 K 4000 K	220	24	12/31.25			
			/	G B	/	/	7/41.66			
NTT0606	12	7.2	>90	2300 K 2700 K 3000 K 4400 K	400/450/450/450	55/62.5/62.5/62.5	3/10.87	>40	5	IP65
	24	7.2	>90	2300 K 2700 K 3000 K 4400 K	400/450/450/450	55/62.5/62.5/62.5	7/25			